


B8412-60-120-150 BN-BF

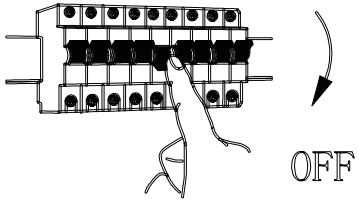


1. Turn off the main power supply before installation to ensure the fixture is de-energized.

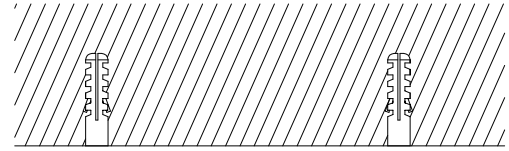


2. After selecting the mounting location, use a hammer drill to create two mounting holes in the wall. Insert expansion bolts into the holes. (Adjust hole spacing based on bracket length; ensure spacing is less than the bracket length.)

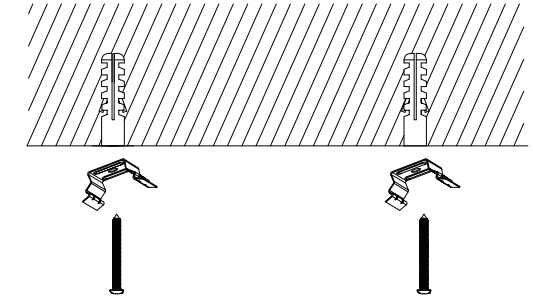


3. Secure the mounting brackets to the ceiling or wall using screws. (For lengths of 1.5 meters or longer, install three mounting brackets as needed based on actual conditions.)

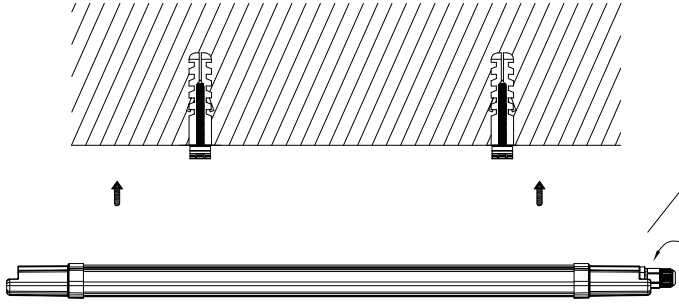

4. Unscrew the quick-connect waterproof connector counterclockwise. Thread the prepared cable through the waterproof cap. Press the quick-connect terminals to connect the L/N wires, then tighten the waterproof cap clockwise.

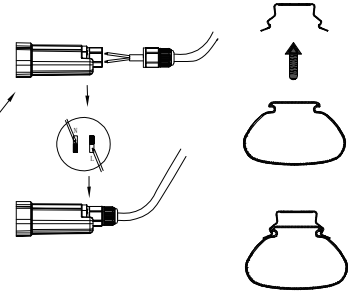

5. Press the light fixture into the mounting bracket to complete installation. The fixture can be slid along the bracket to the desired position as needed.

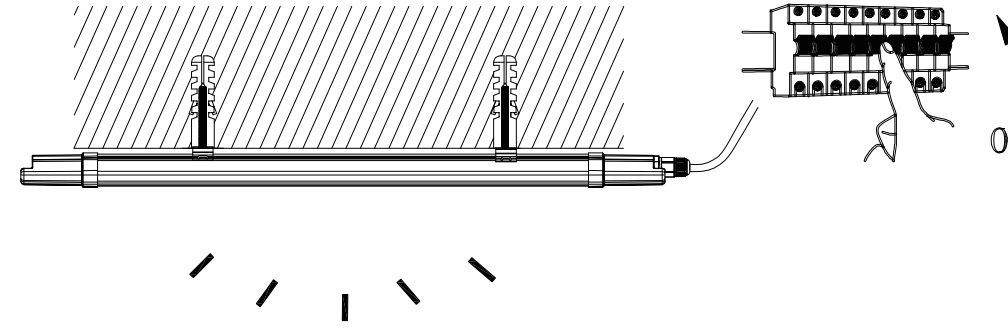

6. After installing the light fixture, turn on the power switch to begin use.